


ERA150

- 2.4 GHz
- 150Mbps
- 27dBm
- AP/Repeater

PRODUCT OVERVIEW

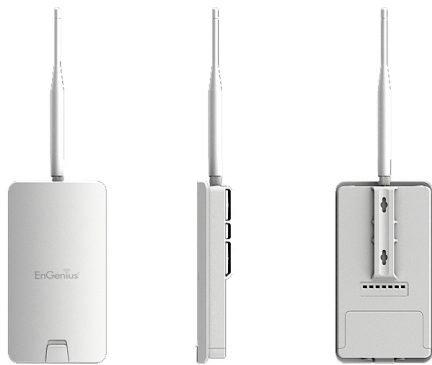

ERA150 is a wireless-11n 150Mbps High Power Repeater. Except for AP function, it can be used as a repeater to extend AP's coverage in your environment.

Maxima 27dBm high power transmission provides extended coverage in your environment. MSSID + VLAN make your data more secure and easy management. Standard PoE interoperable with 802.3af makes internet connection more flexible

ERA150 designed with slim and white color outlook which will not violate your interior decoration. Enhanced mounting bracket kit offers better security to protect being taken easily. ERA150 is truly the best choice to boost your mobility.

SOFTWARE FEATURES

SYSTEM REQUIREMENTS

System	Windows Windows7, 98, ME, NT, XP, 2000. Mac OS X (10.4)	
Access method	Web Based (HTTP 1.0 / 1.1)	
Browser Compatibility	Microsoft IE 6.0 or above, Firefox 2.0 or above	
STATUS		
System Status	System Information	System Up Time, Device Name, Wireless MAC, LAN MAC, Country, Current Time,

ERA150 Data sheet Version 190612

*Theoretical wireless signal rate based on IEEE standard of 802.11 b, g, n chipset used. Actual throughput may vary. Network conditions and environmental factors lower actual throughput rate.

** All specifications are subject to change without notice

BUSINESS CLASS

ERA150

		Firmware Version	
		Current IP Setting	IP Address, Subnet Mask, Default Gateway, DHCP, DNS.
		Current Wireless Setting	Operation mode, Wireless Mode, Channel/Frequency, L2 Isolation, MSSID Setting
Client List		List current associated clients. Show only authorized and associated clients	
System Log		Displays a list of events triggered	
WIRELESS FUNCTIONAL LIST			
Operation mode		AP	
		Repeater	
802.11 mode options		b/g/n	
Channel setting		Manual	
		Auto / Best Channel Selection	
Transfer rate setting		Auto and Manual	
Output Power Control		Select by dBm	
Multiple BSSID (Multi AP)		4 BSSID	
		Each BSSID should has its own WiFi & security settings	
WPS		Software only	
Security	WEP	WEP(64/128bit)	
	WPA/ WPA2	TKIP / AES	
	MAC address filtering	MAC address filtering (WLAN, up to 50 field)	
	802.1x Authenticator	MD5/ TLS/ TTLS, PEAP	
LAN Settings		IP (check validity and DHCP server IP range) MAC	
VLAN	MSSID	VLAN tag on MSSID	
	Management VLAN	Only allow user with specified VID to access the device	
	Ethernet Port VID		
	Tag/ Untag Option	Independent VLAN setting can be enable or disable	
Add VLAN tag		Any packet that enters the Device without a VLAN tag will have a VLAN tag inserted with a PVID (Ethernet Port VID)	
SNMP	SNMP V1/V2C	- SNMP Active : Disabled / Enabled	
	MIBI, MIBII	- SNMP Version : V1/V2C	

	Private MIB	<ul style="list-style-type: none"> - Read Community - Set Community - System Location - System Contact - Trap Active : Disabled / Enabled - Trap Manager IP
Administration		User Name (set as "admin")
		Password (can be changed by user)
		Confirmed Password
Backup/ Restore Setting		<ul style="list-style-type: none"> Save Current Setting Restore Saved Setting Reset to Factory Default
QoS		WMM

TECHNICAL SPECIFICATIONS			
HARDWARE SPECIFICATIONS			
MCU	AR7240+AR9285		
Memory/ Flash	32MB / 8MB		
Physical Interface	LAN: 2 x 10/100 (one of the two LAN ports supports 802.3af PoE standard)		
	Reset x1		
	Power Jack x1		
LED Definition	Power x1	Green	Booting: Blink at 1H Booting: System Ready: On Booting: Firmware Upgrade: Blink at 4Hz Booting: System Off: Power Off
	LAN x2	Green	Link: Solid Light / Active: Blinking (Receiving/ Transmitting data)
	WLAN x1	Green	Link: Solid Light / Active: Blinking (Receiving/ Transmitting data)
	Signal Indicator*3	Green Orange Red	Good: Green / Medium: Orange / Bad: Red
Adapter	12V / 1A		

WIRELESS SPECIFICATIONS			
Frequency Band	Radio I: 11b/g/n : 2.412 ~ 2.484 GHz		
Modulation Technology	OFDM: BPSK, QPSK, 16-QAM, 64-QAM DBPSK, DQPSK, CCK		
Operating Channels	2.4G (11 for North America, 14 for Japan, 13 for Europe) + Super Channels		
Wireless Setting	Operation Mode – AP / Repeater Wireless Mode – 11b/ 11g /11n Channel Selection (Setting varies by Country) Channel Bandwidth (20Mhz, 40Mhz) Transmission Rate – 2.4GHz: 11n only ,11b/g/n mix ,11b only ,11b/g, 11g only		
Receive Sensitivity (Typical)	802.11b -97dBm @ 1Mbps -89dBm @ 11Mbps 802.11g -96dBm @ 6Mbps -75dBm @ 54Mbps	802.11n (2.4GHz) -96dBm @ MCS0 -74dBm @ MCS7	
Available transmit power (2 stream) (The Max. Power may be different depending on local regulations)	11b	1Mbps - 11Mbps	27
	11g	6Mbps - 9Mbps	26
		12Mbps - 18Mbps	26
		24Mbps - 36Mbps	25
		48Mbps - 54Mbps	23
	11n	MCS 0-1	26
		MCS 2-3	26
		MCS 4-5	25
MCS 6-7		23	
Antenna	External 5dBi 1x1 ANT.		

ENVIRONMENT AND MECHANICAL	
Temperature Range	0 to 50° C - Operating, -20 to 60 ° C - Storage
Humidity (non-condensing)	90% or less – Operating, 90% or less - Storage

CERTIFICATION	
▶ FCC	

▶ CE

▶ IC

PACKAGE CONTENT

▶ ERA150

▶ Power Adapter

▶ CD with User's Manual

▶ QIG

▶ Ethernet cable

▶ Security Mounting Bracket

▶ Wall Mount screw kit

Contact

E-mail: service@engeniustech.com.au

1300 725 323

1/14 Wellington Street, ACACIA RIDGE QLD 4110 Australia

Check www.engeniustech.com.au for your contact information