

ETR9350

802.11b/g/n Pocket-Size AP/Router

- 2.4GHz
- 300Mbps



Same as ACTUAL size

PRODUCT DESCRIPTION


ETR9350 is a 2T2R Wireless Single chip 11N Travel AP/Router that delivers up to 6x faster speeds than 802.11g devices. ETR9350 drives superior performance and unparalleled wireless range. With easy to use on the WPS function, it helps users to connect to wireless device with just one push button.

Just leave power adapter behind and enjoy the convenience that embedded power brings. Device can be slipped into your pocket easily and build Wireless Networks somewhere you want. With Clear LED indicator user can identify running operation mode painless

HOUSING LOOK

We call it **"A real pocketable 3G router"**

802.11n, 2T x 2R, 1 Ethernet Port

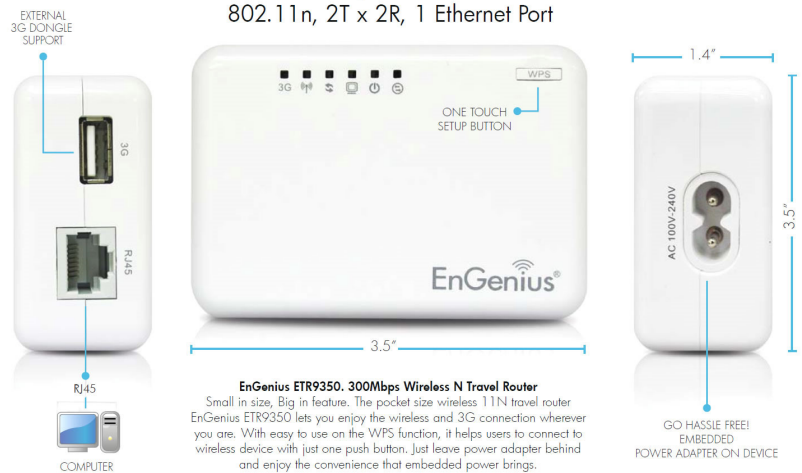

EnGenius ETR9350. 300Mbps Wireless N Travel Router

Small in size, Big in feature. The pocket size wireless 11N travel router EnGenius ETR9350 lets you enjoy the wireless and 3G connection wherever you are. With easy to use on the WPS function, it helps users to connect to wireless device with just one push button. Just leave power adapter behind and enjoy the convenience that embedded power brings.

ETR9350 Datasheet Version 19062009

*Theoretical wireless signal rate based on IEEE standard of 802.11 b, g, n chipset used. Actual throughput may vary. Network conditions and environmental factors lower actual throughput rate.

** All specifications are subject to change without notice

HOME AND HOME OFFICE

ETR9350

TECHNICAL SPECIFICATION						
> Hardware Specification						
Physical Interface		WAN/LAN: One 10/100 Fast Ethernet RJ-45 Power Jack WPS (WiFi Protected Setup) USB port for 3G				
LEDs Status		Operation Mode Power Status WAN (Internet connection) WLAN(Wireless connection) WPS USB port				
Power Requirements		Power Board embedded				
> Top Panel LED						
Operation Mode		1 (AP/Router/CB variant mode will display variant color)				
Power		1 (Link-> blue static on)				
WAN		1 (Link-> blue static on, traffic->blink)				
WLAN		1 (Link-> blue on, traffic->blink)				
WPS		1 (Link-> Associate Done, Processing->blink)				
USB		1 (Link blue static on)				
> RF Specification						
Frequency Band		2.400 ~ 2.484 GHz				
Modulation Technology		OFDM BPSK, QPSK, 16-QAM, 64-QAM DBPSK, DQPSK, CCK				
Operating Channels		11 for North America, 14 for Japan, 13 for Europe				
Wireless Setting		Wireless Mode – 11b/ 11g /11n channel Selection (Setting varies by Country) channel Bandwidth (Auto, 20Mhz, 40Mhz) Transmission Rate -11g: Best. 54, 48, 36, 24, 18, 12, 11, 9, 6, 5.5, 2, 1 in Mbps				
		MCS Index	Guard Interval 800ns		Guard Interval 400ns	
			20MHz	40MHz	20MHz	40MHz
		0	6.5	13.5	7.2	15
		1	13	27	14.4	30
		2	19.5	40.5	21.7	45
		3	26	54	28.9	60
		4	39	81	43.3	90
		5	52	108	57.8	120
		6	58.5	121.5	65	135
		7	65	135	72.2	157.5
		8	13	27	14.4	30
		9	26	54	28.9	60
		10	39	81	43.3	90
		11	52	108	57.8	120
		12	78	162	86.7	180
		13	104	216	115.6	240
14	117	243	130	270		
15	130	270	144.4	300		

> RF Specification	
Receive Sensitivity (Typical)	IEEE802.11n MCS0@ -79dBm MCS7@ -61dBm IEEE802.11g 6Mbps@ -90dBm 54Mbps@ -70dBm IEEE802.11b 1Mbps@ -90dBm Mbps@ -87dBm
Available transmit power	IEEE802.11N MCS7@ 14dBm IEEE802.11g 6~54 Mbps@ 14dBm IEEE802.11b 1~11Mbps@ 17.5dBm
Antenna *2	Peak Gain = 2 dBi embedded ANT

SOFTWARE FEATURES	
> Router and Gateway	
Topology	Infrastructure
Operation Mode	AP/Router/CB
LAN	DHCP Server Static Routing Table UPNP
WAN	PPTP PPPoE Static IP
Router	NAT/ NATP Static Routing Dynamic Route
Firewall	<ul style="list-style-type: none"> Blocking Ping DoS(Blocking Ping, Port scan, Sync Flood) MAC / IP Filtering ICMP Blocking SPI (Stateful Packet Inspection) DMZ (Demilitarized Zone) Host Policy Based Parental Controls <ul style="list-style-type: none"> Port Range / Service Filtering Internet Domain Restriction - Dynamic URL Filtering (OEM subscription service)
VPN	VPN pass-through (PPTP, L2TP, IPSEC)

Wireless	<ul style="list-style-type: none"> • Power saving(Green technology) • 64/128 bit WEP Encryption • WPA Personal (WPA-PSK using TKIP or AES) • WPA Enterprise (WPA-EAP using TKIP) • 802.1x Authenticator • Hide SSID in beacons • Wi-Fi Protection Setup (WPS) • ACL control • Best channel selection • Speed/Bandwidth monitor
QoS	<ul style="list-style-type: none"> • WMM • Application base <ul style="list-style-type: none"> - Priority Queue - Bandwidth Allocation
> Managament	
Configuration	Web-based configuration (HTTP)
Firmware Upgrade	Via webpage upgrade Auto recovery once firmware upgrade fail
Administrator Setting	Administrator password change Idle time out
Reset Setting (WPS button)	5sec Reset 10sec Reset to Default
System monitoring	Speed and Bandwidth monitoring
Scheduling	Enable power saving
Easy access	User can type model name and access the main page.
Install wizard	Guide user to set-up Router smoothly

ENVIRONMENT AND PHYSICAL	
Temperature Range	0 to 40° C - Operating -10 to 70 ° C - Storage
Humidity (non-condensing)	15% ~ 95% typical
Dimensions	90mm (L) x 63mm (W) x 31mm (H)

PACKAGE CONTENT	
▶ 1 x 802.11N Pocket 3G router (ETR9350)	
▶ 1 x CD with User's Manual	
▶ 1 x QIG	
▶ 1 x AC cord	

Contact

E-mail: service@engeniustech.com.au
1300 725 323
1/14 Wellington Street, ACACIA RIDGE QLD 4110 Australia
Check www.engeniustech.com.au for your contact information