



# EnGenius ETR9350

## 3G Connection Quick Start Guide


### Step 1

Open your Internet Browser and type 192.168.0.1

Then **Username: admin** , **Password: admin**

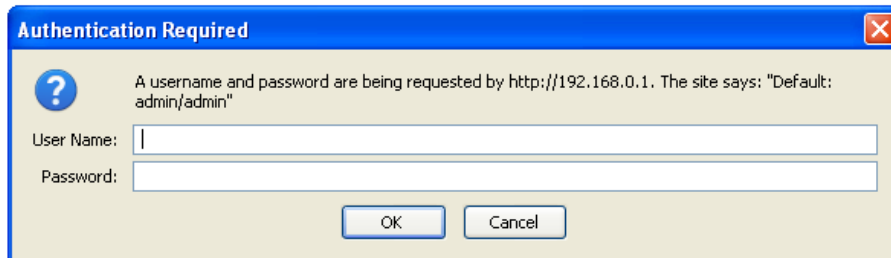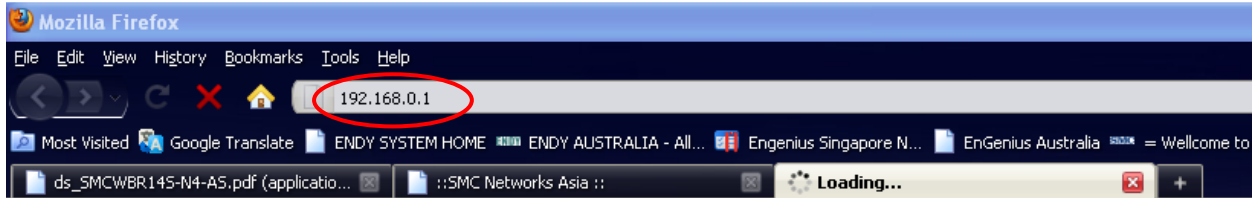


Click **Wizard** -> then Click Next

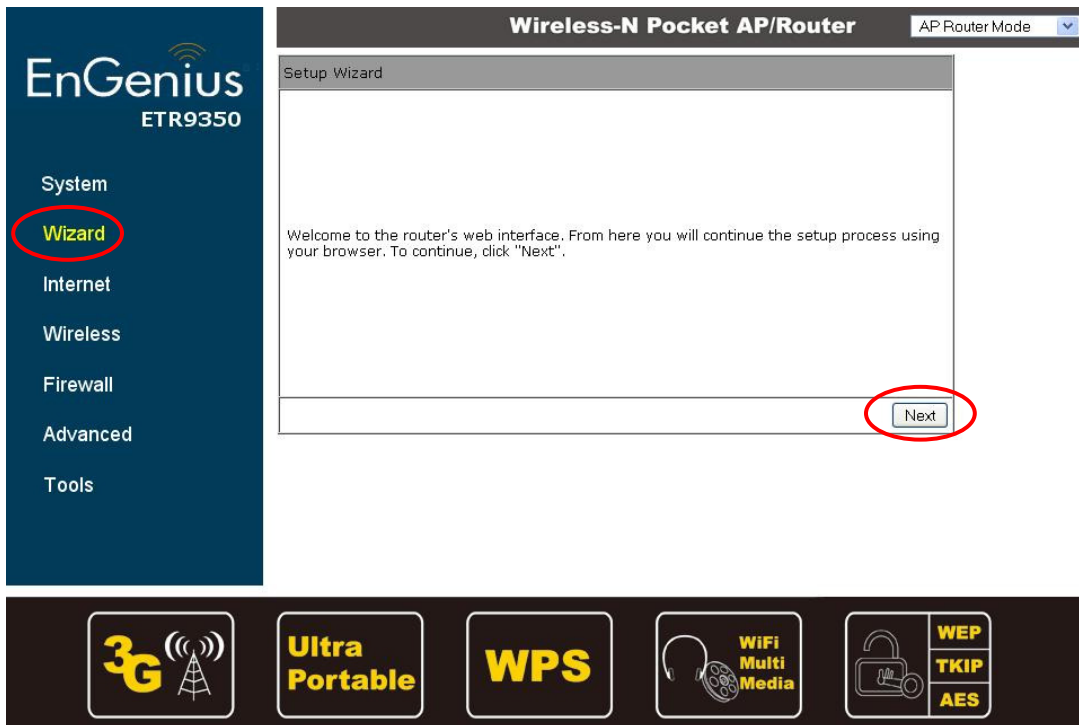

# EnGenius ETR9350

## 3G Connection Quick Start Guide

Pick the **AP Router Mode** -> then Next

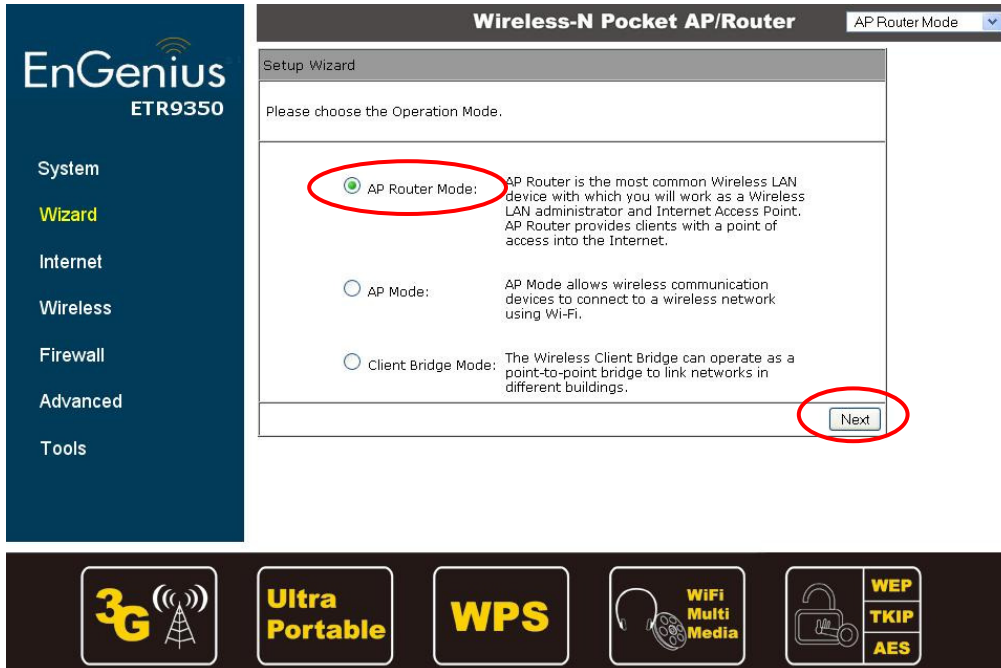

The screenshot shows the 'Setup Wizard' for the EnGenius ETR9350. The 'Wireless-N Pocket AP/Router' header is at the top, with a dropdown menu set to 'AP Router Mode'. The main area is titled 'Please choose the Operation Mode.' and contains three radio button options: 'AP Router Mode' (selected and circled in red), 'AP Mode', and 'Client Bridge Mode'. Each option has a brief description. A 'Next' button is circled in red at the bottom right. A sidebar on the left lists 'System', 'Wizard' (highlighted), 'Internet', 'Wireless', 'Firewall', 'Advanced', and 'Tools'. A bottom banner features icons for 3G, Ultra Portable, WPS, WiFi Multi Media, and security protocols (WEP, TKIP, AES).

**Wireless-N Pocket AP/Router** AP Router Mode

Setup Wizard

Please choose the Operation Mode.


☒ **AP Router Mode:** AP Router is the most common Wireless LAN device with which you will work as a Wireless LAN administrator and Internet Access Point. AP Router provides clients with a point of access into the Internet.

☐ **AP Mode:** AP Mode allows wireless communication devices to connect to a wireless network using Wi-Fi.

☐ **Client Bridge Mode:** The Wireless Client Bridge can operate as a point-to-point bridge to link networks in different buildings.

Next

It will automatic detecting

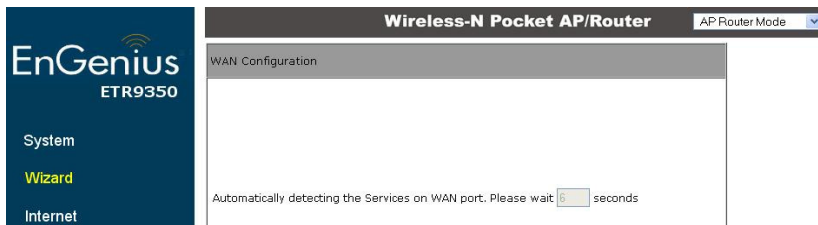


The screenshot shows the 'WAN Configuration' screen. The header is 'Wireless-N Pocket AP/Router' with a dropdown set to 'AP Router Mode'. The main area is titled 'WAN Configuration' and contains the text 'Automatically detecting the Services on WAN port. Please wait 5 seconds'. A sidebar on the left lists 'System', 'Wizard' (highlighted), and 'Internet'. The bottom banner is the same as the previous screen.

**Wireless-N Pocket AP/Router** AP Router Mode

WAN Configuration

Automatically detecting the Services on WAN port. Please wait 5 seconds

Pick the **3G** -> then Next

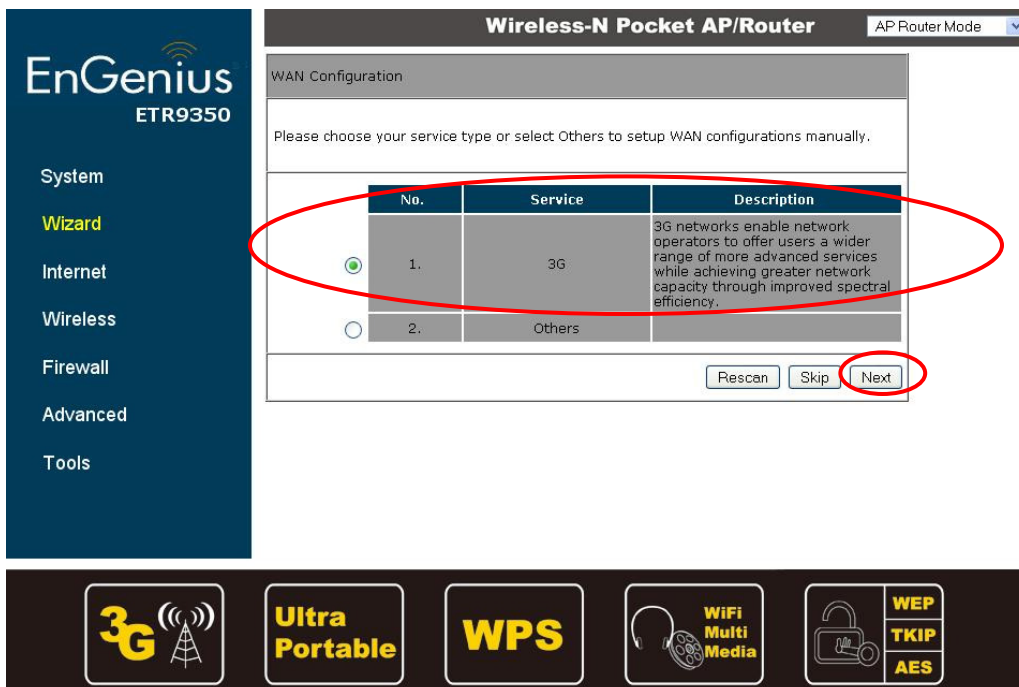

The screenshot shows the 'WAN Configuration' screen with a table of service options. The '3G' option is selected and circled in red. A 'Next' button is also circled in red. The sidebar and bottom banner are the same as the previous screen.

**Wireless-N Pocket AP/Router** AP Router Mode

WAN Configuration

Please choose your service type or select Others to setup WAN configurations manually.

No.	Service	Description
1.	3G	3G networks enable network operators to offer users a wider range of more advanced services while achieving greater network capacity through improved spectral efficiency.
2.	Others	

Rescan Skip Next

# EnGenius ETR9350

## 3G Connection Quick Start Guide

For Telstra User APN Code: **telstra.internet**

For Bigpond User APN Code: **telstra.bigpond**

^Please Reference to our [EnGenius 3G Dongle compatibility list and APN](#) to check different APN for different ISP

Dial Number: **\*99#**

**NOTE\*** for Bigpond user please fill the **User Name** (with the rest of the email address such as: xxxx@bigpond.com) and **Password** which Bigpond provide to you.

-> Then Next

The screenshot shows the 'Setup Wizard' for the 'Wireless-N Pocket AP/Router' in 'AP Router Mode'. The left sidebar lists 'System', 'Wizard' (highlighted), 'Internet', 'Wireless', 'Firewall', 'Advanced', and 'Tools'. The main area is titled 'Please, enter the data which is supplied by your ISP.' and contains the following fields:

- Login Method: Mobile 3G (dropdown)
- Pin Code: (empty text box)
- APN Code: telstra.internet (text box, highlighted with a red rectangle)
- Dial Number: \*99# (text box, highlighted with a red rectangle)
- User Name: (empty text box)
- password: (empty text box)

A 'Next' button is located at the bottom right of the form, also highlighted with a red circle.



For Wireless Security – here is the example of **WPA**

Enter the **SSID** and **Password** as what you want -> then Next

The screenshot shows the 'WLAN Configuration' screen for the 'Wireless-N Pocket AP/Router' in 'AP Router Mode'. The left sidebar is the same as the previous screen. The main area is titled 'Please choose the security level in the security bar' and shows a bar with 'Lowest', 'Highest', and a 'WPA' button (highlighted with a red circle). Below this, it says 'Type of wireless security: WPA' and 'Strength: High'. A text box explains: 'WPA security offers high strength wireless security but lower compatibility with older wireless network equipment. Enter a security key that is between 8-63 characters long. Make sure the key is not a word or number that is easy to guess.' Below this, there are two text boxes: 'SSID: EnGeniusExample' and 'Key: 1234567890' (both highlighted with a red rectangle). At the bottom right, there are 'Skip' and 'Next' buttons, with 'Next' highlighted by a red circle.



# EnGenius ETR9350

## 3G Connection Quick Start Guide

Please check the Setup Details -> then Reboot

EnGenius  
ETR9350

System

Wizard

Internet

Wireless

Firewall

Advanced

Tools

Wireless-N Pocket AP/Router

AP Router Mode

Setup Successfully

System Configuration:

Operation Mode : AP Router

WAN Configuration:

Connection Type : Mobile 3G

WLAN Configuration :

SSID : EnGeniusExample

Security : WPA pre-shared key

WLAN Key : 1234567890

WLAN Router setup successfully. Please click reboot button to reboot system.

Reboot

3G

Ultra Portable

WPS

WiFi Multi Media

WEP

TKIP

AES