



EnGenius ESR6650

3G Connection Quick Start Guide


Step 1

Open your Internet Browser and type 192.168.0.1

Then **Username: admin** , **Password: admin**

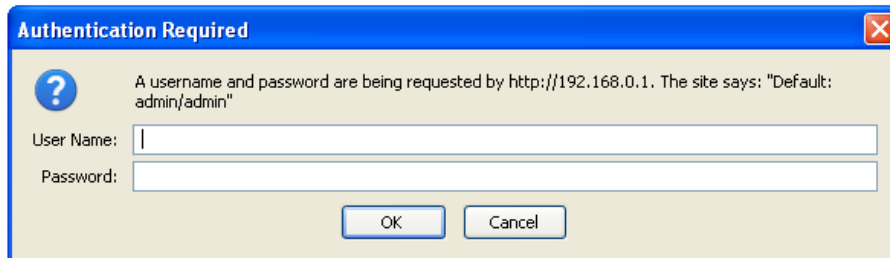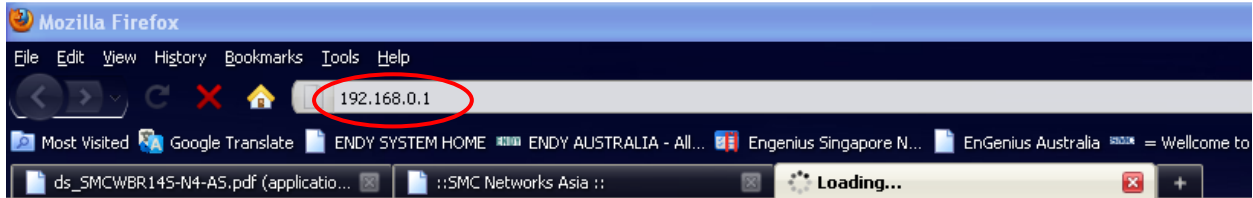


Click **Wizard** -> then Click Next

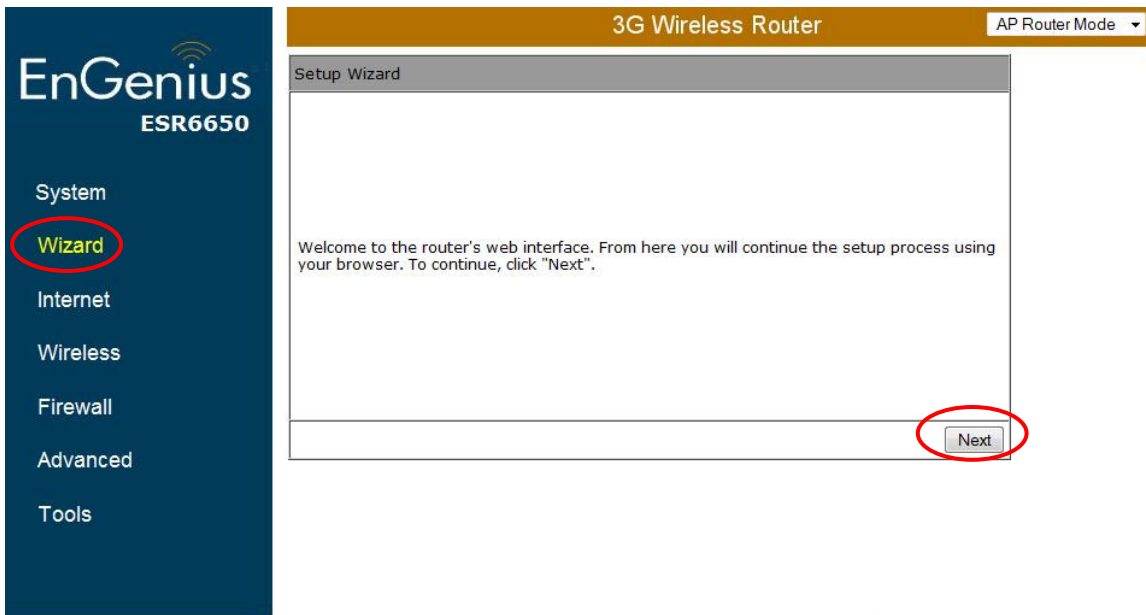

EnGenius ESR6650

3G Connection Quick Start Guide

Pick the **AP Router Mode** -> then Next

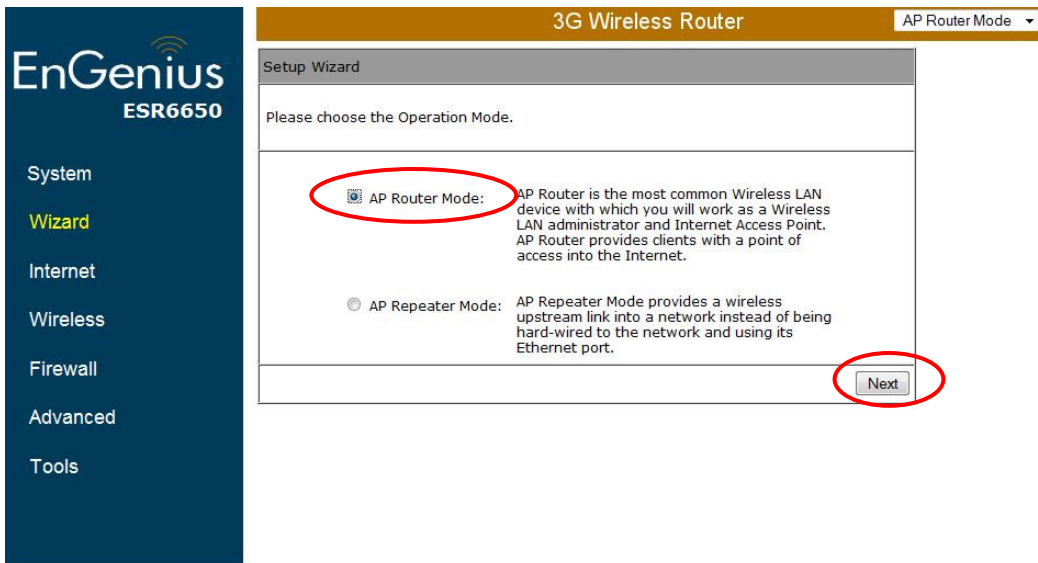

3G Wireless Router AP Router Mode

Setup Wizard

Please choose the Operation Mode.

AP Router Mode: AP Router is the most common Wireless LAN device with which you will work as a Wireless LAN administrator and Internet Access Point. AP Router provides clients with a point of access into the Internet.

AP Repeater Mode: AP Repeater Mode provides a wireless upstream link into a network instead of being hard-wired to the network and using its Ethernet port.

Next



It will automatic detecting




3G Wireless Router AP Router Mode

WAN Configuration

Automatically detecting the Services on WAN port. Please wait seconds

Pick the **3G** -> then Next

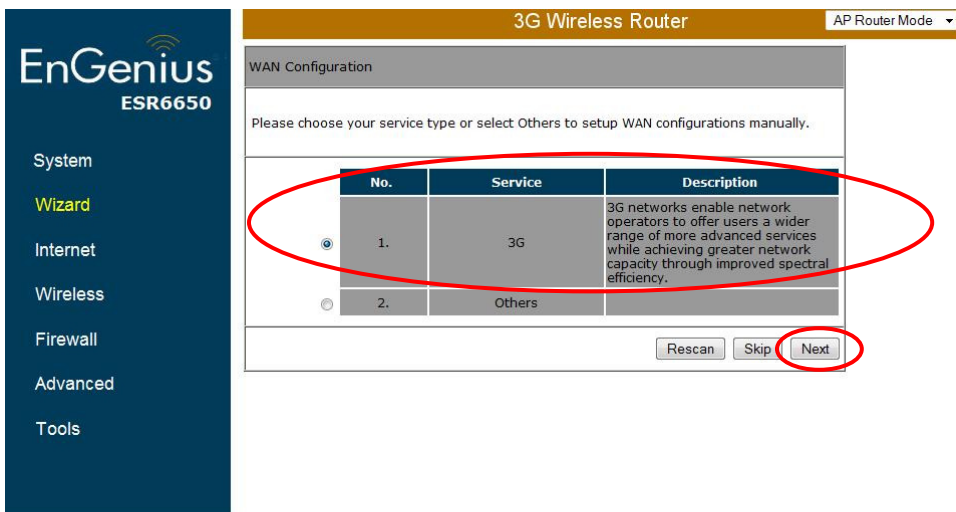

3G Wireless Router AP Router Mode

WAN Configuration

Please choose your service type or select Others to setup WAN configurations manually.

No.	Service	Description
<input checked="" type="radio"/> 1.	3G	3G networks enable network operators to offer users a wider range of more advanced services while achieving greater network capacity through improved spectral efficiency.
<input type="radio"/> 2.	Others	

Rescan Skip Next



EnGenius ESR6650

3G Connection Quick Start Guide

For Telstra User APN Code: **telstra.internet**

For Bigpond User APN Code: **telstra.bigpond**

^Please Reference to our [EnGenius 3G Dongle compatibility list and APN](#) to check different APN for different ISP

Dial Number: ***99#**

NOTE* for Bigpond user please fill the **User Name** (with the rest of the email address such as: abc123@bigpond.com) and **Password** which Bigpond provide to you.

-> Then Next

3G Wireless Router AP Router Mode

Setup Wizard

Please, enter the data which is supplied by your ISP.

Login Method: Mobile 3G

Pin Code :

APN Code: telstra.bigpond

Dial Number: *99#

User Name: abc123@bigpond.com

password: ●●●●●● Only for Bigpond user

Next

EnGenius ESR6650

System

Wizard

Internet

Wireless

Firewall

Advanced

Tools



EnGenius ESR6650

3G Connection Quick Start Guide

For Wireless Security – here is the example of **WPA**
Enter the **SSID** and **Password** as what you want -> then Next

3G Wireless Router AP Router Mode

WLAN Configuration

Please choose the security level in the security bar

Lowest Highest

Type of wireless security: **WPA**
Strength: High

WPA security offers high strength wireless security but lower compatibility with older wireless network equipment.

Enter a security key that is between 8-63 characters long. Make sure the key is not a word or number that is easy to guess.

SSID : EnGeniusexample|
Key : 1234567890

Skip Next

3G WPS Antenna Upgradable HACKER SHIELD WEP TKIP AES

Please check the Setup Details -> then Reboot

3G Wireless Router AP Router Mode

Setup Successfully

System Configuration:
Operation Mode : AP Router

WAN Configuration:
Connection Type : Mobile 3G

WLAN Configuration :
SSID : EnGeniusexample
Security : WPA pre-shared key
WLAN Key : 1234567890

WLAN Router setup successfully. Please click reboot button to reboot system.

Reboot

3G WPS Antenna Upgradable HACKER SHIELD WEP TKIP AES